



# Packaging Dynamics, Ltd.


35B Carlough Road, Bohemia, New York 11716

Tel: 631.563.4499 • Fax: 631.563.4893

## SLS SEMI AUTOMATIC LIQUID FILLER



**ISSA** <sup>®</sup>  
The Experts  
on Cleaning and Maintenance

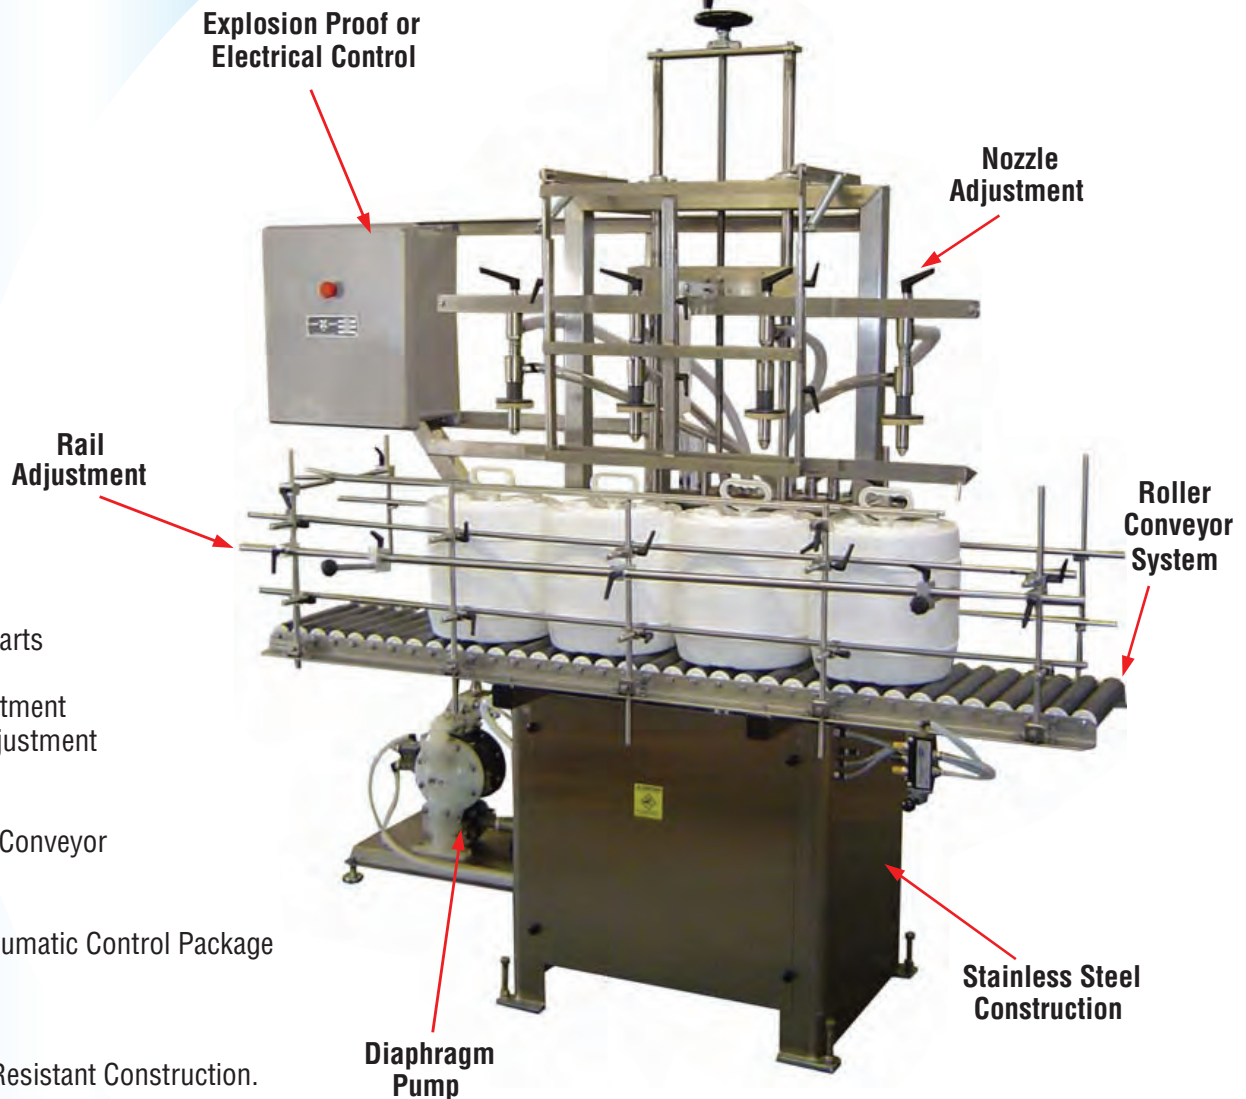

### Features

- Stainless Steel contact parts
- Fill to Level System
- Quick Change Rail Adjustment
- Quick Change Nozzle Adjustment
- Roller Conveyor System
- Semi-Automatic Filling
- Stainless Steel Frame & Conveyor
- Aro Diaphragm Pump
- Poly (30) Gallon Tanks
- Nema 4 Electrical or Pneumatic Control Package

### Options

- Stainless Steel Tanks
- Teflon Coating for Acid Resistant Construction.
- Splash Guards
- Product Mixer
- Bottom Feed Nozzles




# Packaging Dynamics, Ltd.

35B Carlough Road, Bohemia, New York 11716  
Tel: 631.563.4499 • Fax: 631.563.4893

## DESIGNED AND ENGINEERED FOR ECONOMY

6 ft, 8 ft, 10 ft, 12 ft and custom conveyor lengths are available  
79.00"  
34.50" Adjustable

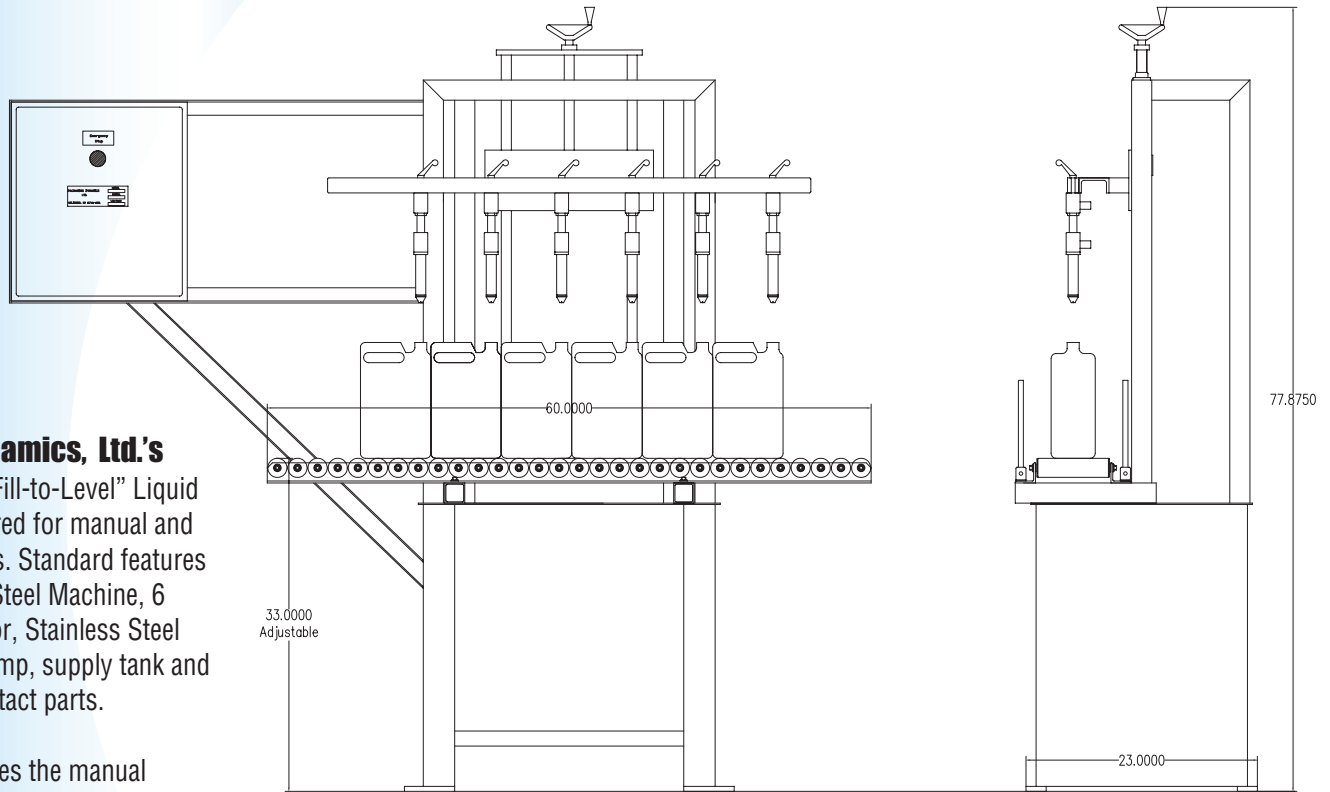

### Packaging Dynamics, Ltd.'s

Semi-Automatic "Fill-to-Level" Liquid Filler was engineered for manual and incase applications. Standard features include Stainless Steel Machine, 6 foot roller conveyor, Stainless Steel frame, product pump, supply tank and stainless steel contact parts.

The operator pushes the manual container stop out, moves the containers to be filled along the roller conveyor surface into position under the nozzle bar assembly and pushes the cycle start button. Upon completion of the fill cycle the nozzle bar assembly automatically returns to the starting position. It's as simple as that.

Included with the machine's standard features are Quick change nozzle adjustment and Quick change conveyor rail adjustment handles that aid in reducing expensive change over periods.

### Specifications

#### DESCRIPTION

Container size	2 oz to 5 gallons
Nozzles available	4 to 12
Construction	Stainless Steel
Overall dimensions	79"H x 64"W x 34.5" adjustable (excluding gravity feed tank)
Air consumption	8 to 10 cfm
Weight	Approximately 700 lbs