



Packaging Dynamics, Ltd.

35B Carlough Road, Bohemia, New York 11716
Tel: 631.563.4499 • Fax: 631.563.4893

FULLY AUTOMATIC POSITIVE DISPLACEMENT FILLER




Nema 4 Control Panel
with Allen Bradley Components

Nozzle Height
Adjustment to
Accommodate
Container
Heights

Stainless Steel Mass
Flow Liquid Meter

Positive Closure Nozzles




Re-circulating SS Valves
to Prevent
Over Pressurizing

SS 316 or Magnetic Drive
Centrifugal Pump

Stainless Steel Construction
and Guards

Powered Conveyor
with TEFC Motor

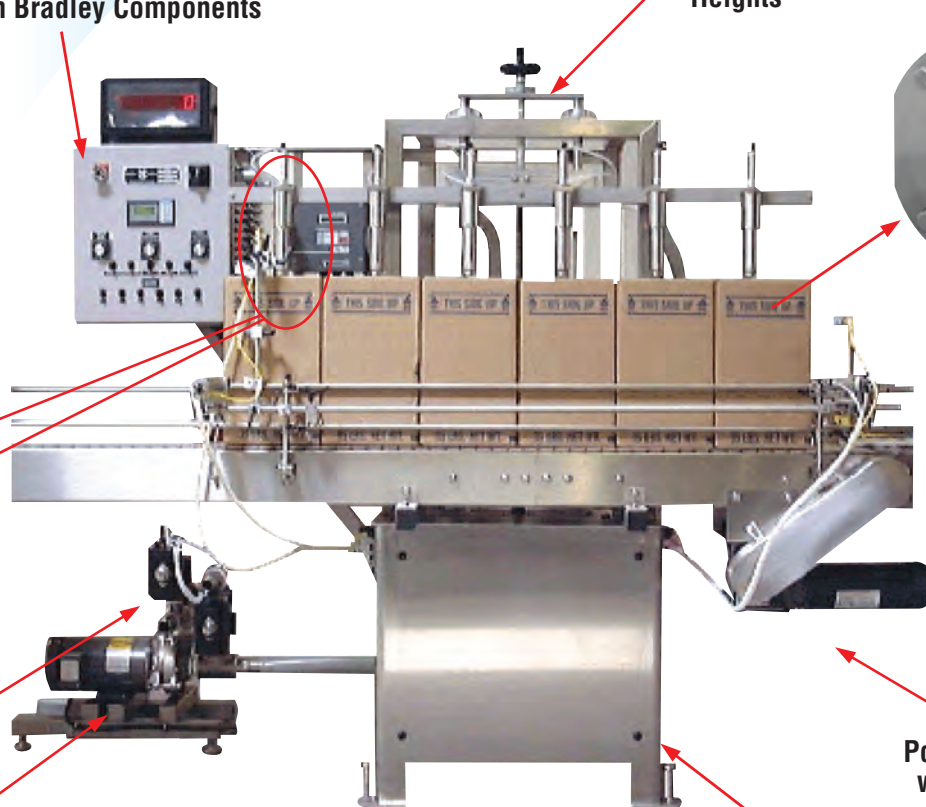

Features

- Fully-Automatic Control Package
- Positive Displacement Metering System
- Stainless Steel Frame & Conveyor
- Stainless Steel Contact Parts
- Stainless Steel Centrifugal Pump
- Polypropylene Supply Tank
- Nema 4 Electrics
- 110 or 220 VAC Operation
- Quick Change Rail & Nozzle Adjustment
- Powered Conveyor System
- Mechanical Drip Tray

Benefits

- High Speed & Volume Production
- High Accuracy Fill, Less Product Wasted
- Heavy Gauge Stainless Steel Construction
- Low Maintenance & Operating Cost
- Designed With Common Parts For Easy & Quick Replacement.
- Adaptable To Fit A Variety Of Different Container Styles & Sizes.
- Easy Clean Ups
- High Efficiency Motors

Options


- Stainless Steel Tanks
- Splash Guard
- Bottom Fill Nozzles
- Centering Devices
- Sanitary Connections
- Explosion Proof Construction
- 220v AC Operation
- Stainless Steel Transfer Plate
- Incase Filling



Packaging Dynamics, Ltd.

35B Carlough Road, Bohemia, New York 11716
Tel: 631.563.4499 • Fax: 631.563.4893

DESIGNED TO HANDLE CHEMICAL PRODUCT FILLING

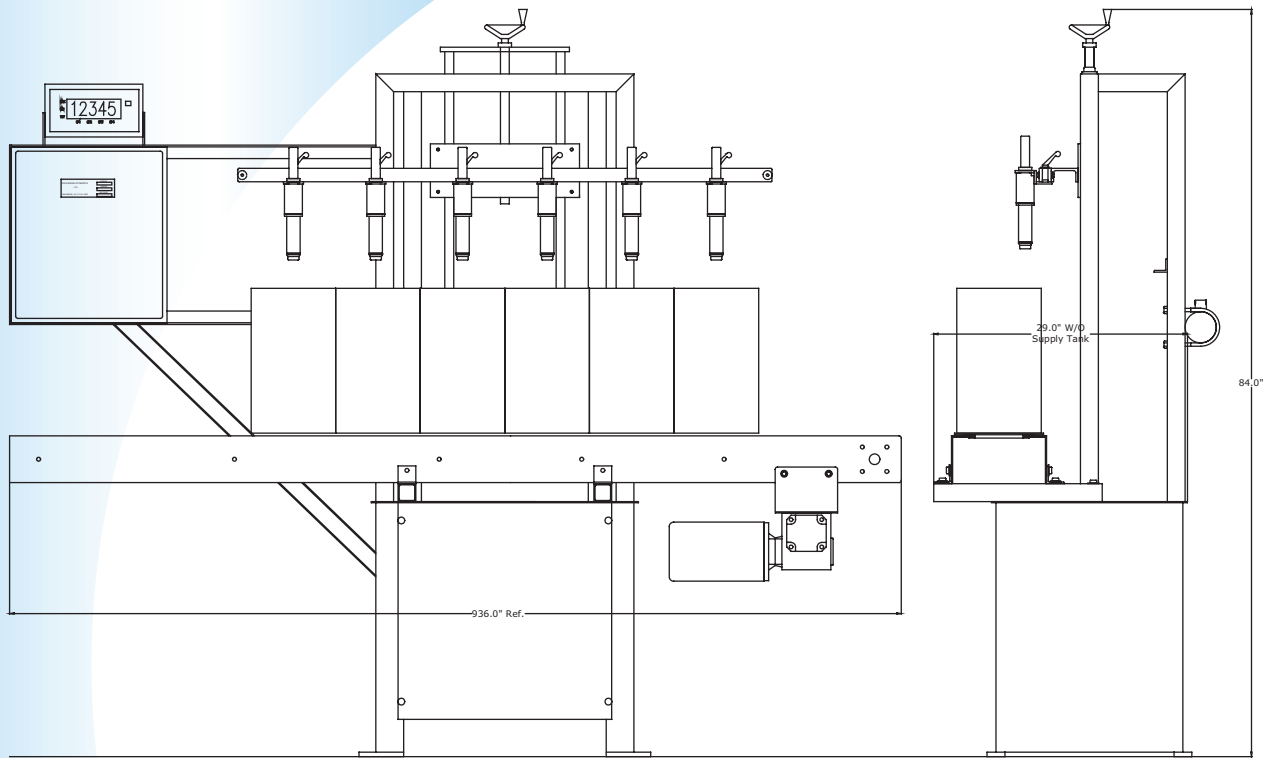

Packaging Dynamics Ltd. introduces the **Accu-Flo** Liquid Filler (SLA-V6) which utilizes positive-displacement flowmeter technology. Our Positive Displacement Flow Meters use two rotating thermoplastic impellers driven by flowing liquid. Magnets imbedded in the impellers activate a non intrusive sensor which generates a pulsed output signal. Each pulse represents a known volume. A K-Factor converts the pulses into engineering units for remote data collection and digital display. This process allows our fillers to achieve a +/- 0.5% accuracy and repeatability. The meter has only two moving parts, no bearings, no motors, no clutch or brakes and is programmed through our microprocessor touch pad for virtually any volume. This reduces the amount of mechanical moving parts and adds to the long term reliability of the system. The size and output of the Flow Meter ranges from 1/4" NPT to 1.5" NPT depending on the size of the container, the viscosity of the product and the speed required. This equipment is available from single to twelve head models and handles viscosities from water thin to gels and thick creams. Available in semi and fully-automatic variations, the Accu-Flo can be used to fill from fractional containers to 55 gallon drums.

Specifications

DESCRIPTION

Container size	0.5 oz to 55 gallon drums
Nozzles available	1 to 12
Construction	Stainless Steel
Overall dimensions	84"H x 29"W to 93"D (excluding supply tank)
Air consumption	2 to 6 scfm
Weight	Approximately 700 lbs.