



# Packaging Dynamics, Ltd.

35B Carlough Road, Bohemia, New York 11716

Tel: 631.563.4499 • Fax: 631.563.4893

## SEMI AUTOMATIC FILLER WITH SLIDE PLATE



**ISSA**®  
The Experts  
on Cleaning and Maintenance



### Features

- Semi-Automatic with Manual Indexing
- Aro Diaphragm Pump
- Polypropylene Supply tank
- Pneumatic Control Package
- Stainless Steel Contact Parts
- Stainless Steel Frame & Conveyor
- Fill to Level System
- Drip Tray
- Quick Change Rail Adjustment
- Quick Change Nozzle Adjustment
- Slide Plate or Roller Conveyor System

### Options

- Stainless Steel Tanks
- Ceilcoat Finish
- Explosion-Proof Construction
- Splash Guard
- Bottom Fill Nozzles
- Centering Devices
- Sanitary Connections
- Nema 4 or Explosion Proof Electrics
- Powered Conveyor
- Automatic Bottle Indexing & Logic Control
- All Plastic Construction (Acid)
- 110v or 230v AC Operation
- Product Mixer
- Stainless Steel Transfer Plates
- Gravity Feed System in lieu of Pressure System
- Incase Filling
- Teflon Epoxy Coating




# Packaging Dynamics, Ltd.

35B Carlough Road, Bohemia, New York 11716

Tel: 631.563.4499 • Fax: 631.563.4893

## DESIGNED AND ENGINEERED FOR ECONOMY

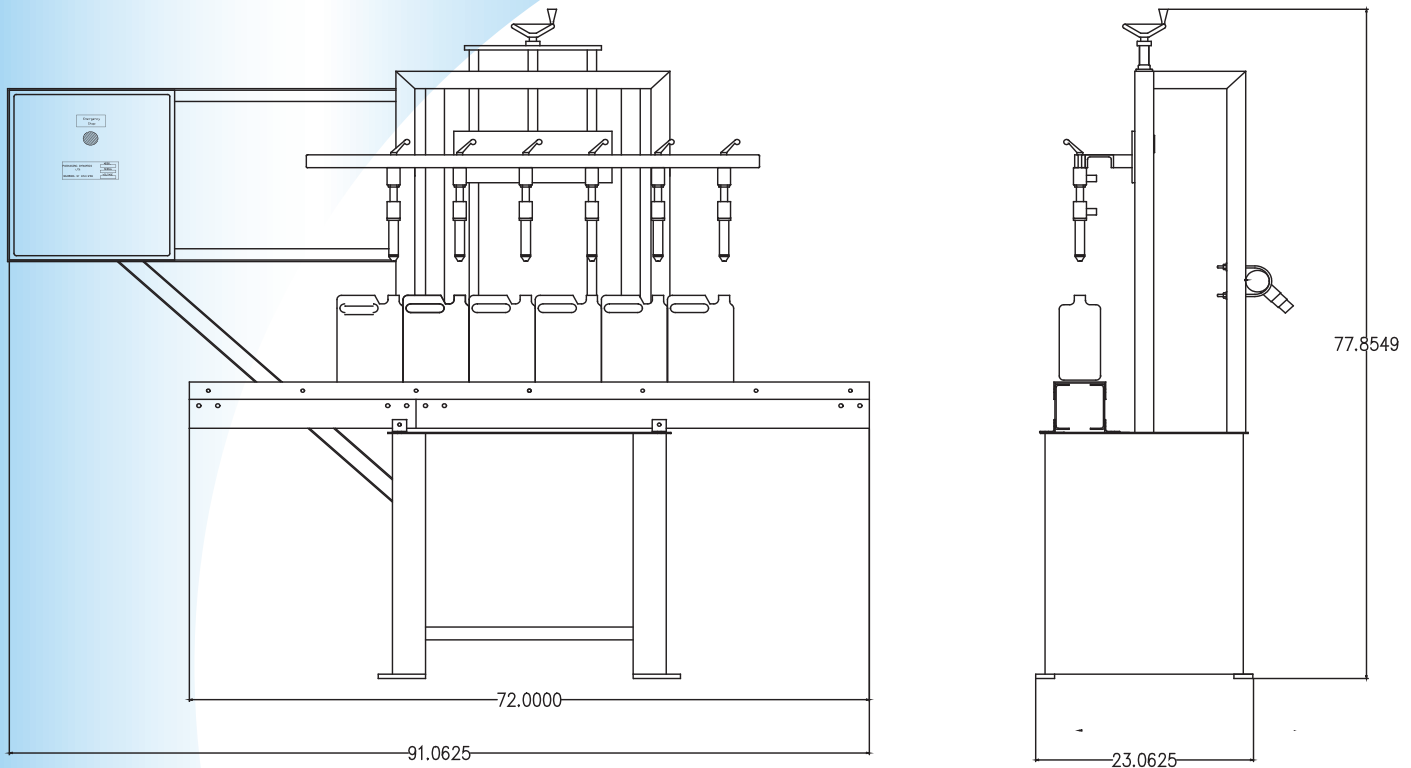

Packaging Dynamics, Ltd.'s Semi-Automatic "Fill-to-Level" Liquid Filler is an economical machine that was engineered for inline and incase applications. Standard features include Stainless Steel construction, four foot slide plate longer available, product pump, supply tank and stainless steel contact parts.

The operator pushes the manual container stop out, moves the containers to be filled along the slide plate surface into position under the nozzle bar assembly, then pushes the manual cycle start button down. The nozzles descend and the fill cycle starts. Upon completion of the fill cycle the nozzle bar automatically returns to the up position.

Also included are Quick change nozzle and conveyor rail adjustment handles that aid in reducing expensive change over periods.

### Specifications

#### DESCRIPTION

Container size	2 oz to 2 1/2 gallons
Nozzles available	4 to 8
Construction	Stainless Steel
Overall dimensions	79"H x 64"W x 34.5" (excluding gravity feed tank)
Air consumption	6 to 8 scfm
Weight	Approximately 700 lbs